

Date:	Type:
Project Name:	Part Number:

## RENO LED 2X2 Back-Lit Panel (ECO) (Multi CCT/Wattage)



### FEATURES

- Recessed, surface mount or suspended installation  
120-347V circuit and 0-10V dimming control compatible
- Low glare technology UGR <19, PF >0.95, 125Lm/W  
120° Beam spread, CRI >83
- Recessed, surface mount or suspended installation  
PF >0.95, UP TO 115Lm/W
- Multi CCT/Wattage
- Temperature Rating : -22°F/-30°C -104° F/40° c
- Rated Lifetime L70(hrs) : >70,000
- 10-year warranty
- DLC Premium 135lms/Watt

### SPECIFICATION

- Great for remodel and new construction
- The Contemporary design of center basket  
LED Improves and upgrades your spaces
- Adjustable multi-color/Wattage dip switch on the driver  
that allows you to change the CCT/Wattage according  
to your project's needs
- Easily installed with maximum energy savings
- Applications: Offices, Schools & Meeting Rooms

## SPECIFICATION

ORDER #	MODEL#	WATTS	DIMMABLE	VOLTS	BEAM ANGLE	INITIAL LUMENS	CCT	CRI
R35302	RENO-22BLPL-UNV-347-MWMCCT-ECO	15/19/ 24/29W	0-10 VDC	120-347V	120°	1725/2185/ 2760/3335	3500/4000 5000K	83+

\*Suitable for Damp locations. Not for use where directly exposed to weather or water

## ACCESSORY INFORMATION

MODEL	PRODUCT	DESCRIPTION
R39202	RENO-SMK22	2X2" Surface Mount Frame
R39204	RENO-RP	70.9" (1.8mm) Aircraft Suspension Cable (set of 4 cables for 1 2"x2" fixture)




Date:

Type:

Project Name:

Part Number:

## DIMENSION

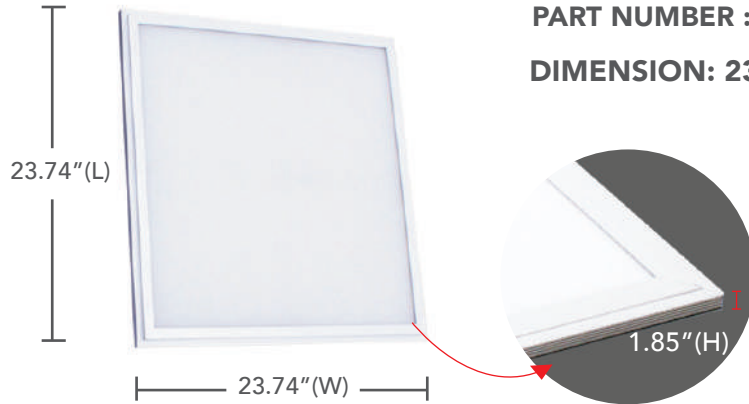

**PART NUMBER : RENO-22BLPL-UNV/347-MWMCCT-ECO**

**DIMENSION: 23.74"(W) X 23.74"(L) X 1.85"(H)**


## LUMINOUS EMITTANCE

### ZONAL LUMENS SUMMARY

Zone	Lumens	% Lamp	% Luminaire
0-30	1,038.7	26.5	26.4
0-40	1,704.5	43.4	43.4
0-60	3,033.4	77.2	77.0
60-90	907.7	23.1	23.0
0-90	3,941.2	100.4	100.0

### LUMENS PER ZONE

Zone	Lumens	%Total
0-10	126.8	3.2
10-20	360.9	9.2
20-30	551.1	14.0
30-40	665.8	16.9
40-50	693.6	17.6
50-60	635.3	16.1
60-70	493.4	12.5
70-80	301.7	7.7
80-90	112.6	2.9

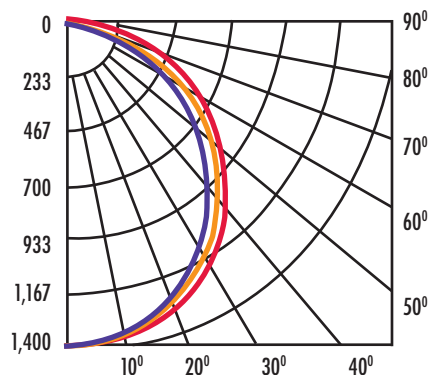

■ 0° H ■ 90° H ■ 45° H

### FLOOD SUMMARY

	Efficiency %	Lumens	Horiz. Spread	Vert. Spread
Field (10%):	98.8	3,877.9	163.7	167.3
Beam (50%):	72	2,827.7	113.3	113.8
Total:	100.3	3,939.9		

