


RENO LED 2X4 Back-Lit Panel (ECO) (Multi CCT/Wattage)

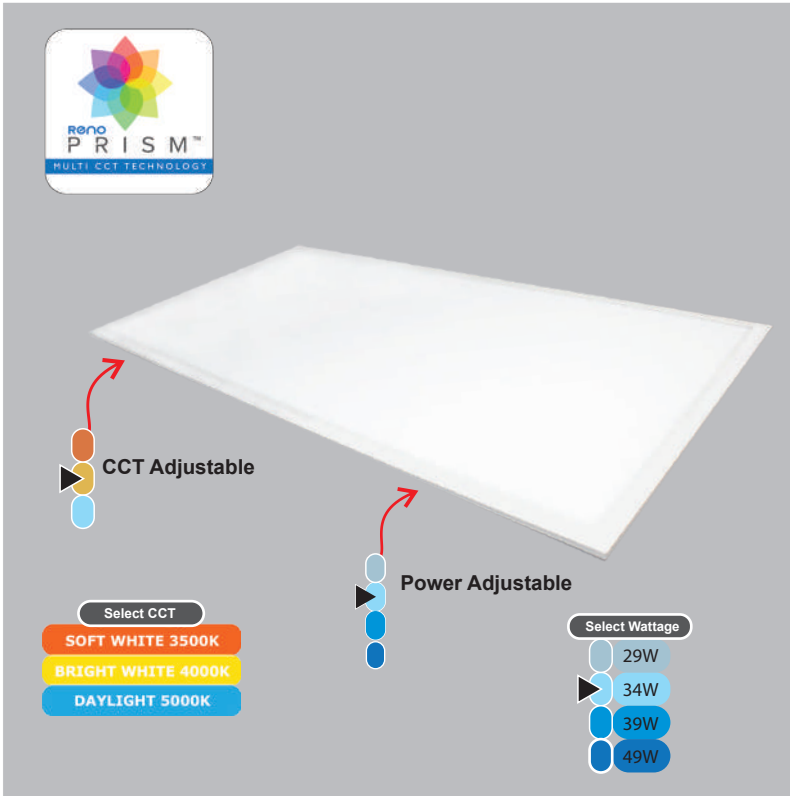

FEATURES

- Recessed, surface mount or suspended installation
120-347V circuit and 0-10V dimming control compatible
- Low glare technology UGR <19, PF >0.95, 125Lm/W
120° Beam spread, CRI >83
- Recessed, surface mount or suspended installation
PF >0.95, UP TO 115Lm/W
- Multi CCT/Wattage
- Temperature Rating : -22°F/-30°C -104° F/40° c
- Rated Lifetime L70(hrs) : >70,000
- 10-year warranty
- DLC Premium 135lms/Watt

SPECIFICATION

- Great for remodel and new construction
- The Contemporary design of center basket LED Improves and upgrades your spaces
- Adjustable multi-color/Wattage dip switch on the driver that allows you to change the CCT/Wattage according to your project's needs
- Easily installed with maximum energy savings
- Applications: Offices, Schools & Meeting Rooms

SPECIFICATION

ORDER #	MODEL#	WATTS	DIMMABLE	VOLTS	BEAM ANGLE	INITIAL LUMENS	CCT	CRI
R35303	RENO-24BLPL-UNV-347-MWMCCT-ECO	29/34/ 39/49W	0-10 VDC	120-347V	120°	3335/3910/ 4485/5635	3500/4000 5000K	83+

*Suitable for Damp locations. Not for use where directly exposed to weather or water

ACCESSORY INFORMATION

MODEL	PRODUCT	DESCRIPTION
R39203	RENO-SMK24	2X4" Surface Mount Frame
R39204	RENO-RP	70.9" (1.8mm) Aircraft Suspension Cable (set of 6 cables for 1 2"x 4" fixture)




Date:

Type:

Project Name:

Part Number:

DIMENSION

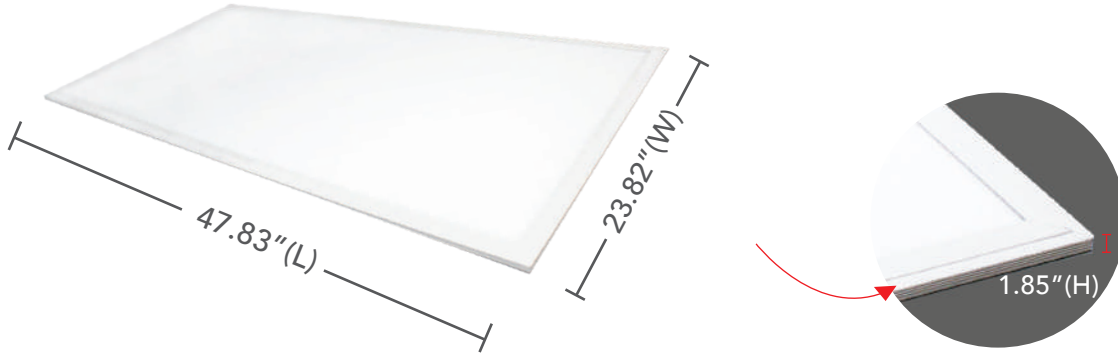PART NUMBER : RENO-24BLPL-UNV/347-MWMCCT-ECO
DIMENSION: 23.82"(W) X 47.83"(L) X 1.85"(H)


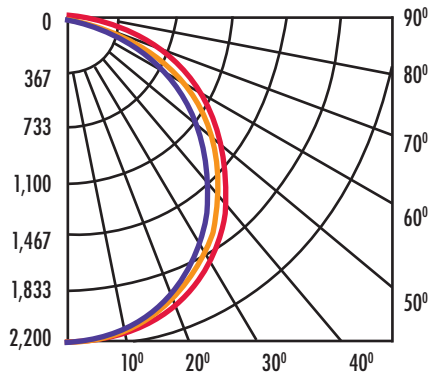
LUMINOUS EMITTANCE

ZONAL LUMENS SUMMARY

Zone	Lumens	% Lamp	% Luminaire
0-30	1,623.2	24.4	25.7
0-40	2,671.5	40.1	42.2
0-60	4,796.5	72.1	75.9
60-90	1,527.0	22.9	24.1
0-90	6,323.5	95	100.0

LUMENS PER ZONE

Zone	Lumens	%Total
0-10	197.4	3.1
10-20	563.1	8.9
20-30	862.8	13.6
30-40	1,048.3	16.6
40-50	1,101.7	17.4
50-60	1,023.3	16.2
60-70	813.3	12.9
70-80	517.8	8.2
80-90	196.0	3.1


■ 0° H ■ 90° H ■ 45° H

FLOOD SUMMARY

	Efficiency %	Lumens	Horiz. Spread	Vert. Spread
Field (10%):	93.7	6,238.3	164.5	169.5
Beam (50%):	68.9	4,584.3	114.9	116.7
Total:	95	6,321.4		

